


SMALL SIGNAL SCHOTTKY DIODE

PINNING

PIN	DESCRIPTION			
1	Cathode			
2	Anode			

Features

• Low forward voltage drop

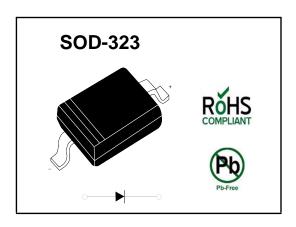

Absolute Maximum Ratings (T_a = 25 °C)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	70	V
Continuous Forward Current	I _F	70	mA
Surge Non-Repetitive Forward Current (tp = 10 ms)	I _{FSM}	1	Α
Total Power Dissipation	P _{tot}	230	mW
Thermal Resistance Junction to Ambient 1)	R _{thJA}	550	°C/W
Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{stg}	- 65 to + 150	°C

¹⁾ Mounted on epoxy board, with recommended pad layout.


Characteristics at T_a = 25 °C


Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at I _R = 10 μA	V_{BR}	70	-	٧
Forward Voltage at I _F = 1 mA	V _F	-	410	mV
Reverse Current at V_R = 50 V	I _R	-	100	nA
Diode Capacitance at $V_R = 0 \text{ V}$, $f = 1 \text{ MHz}$	C_{tot}	-	2	pF


0755-23619906 www.jhgsz.com Rev.01 1/4




Typical Characteristics

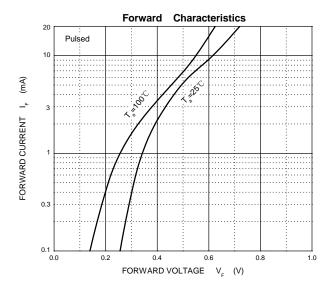

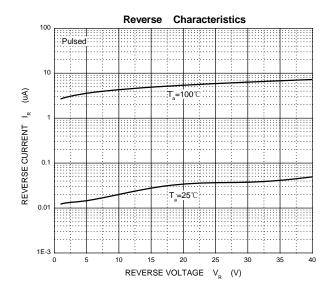

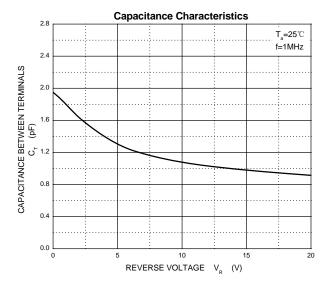

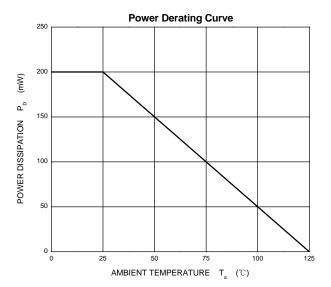


0755-23619906 www.jhgsz.com Rev.01 2 / 4




SOD-323 Tape and Reel


SOD-323 Embossed Carrier Tape

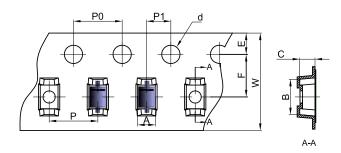

	Dimensions are in millimeter									
Pkg type	Α	В	С	d	E	F	P0	Р	P1	W
SOD-323	1.48	3.3	1.25	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOD-323 Tape Leader and Trailer

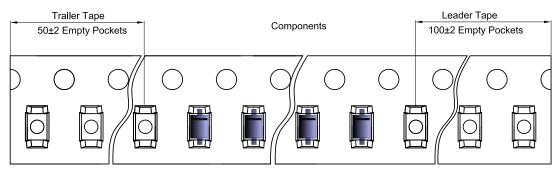

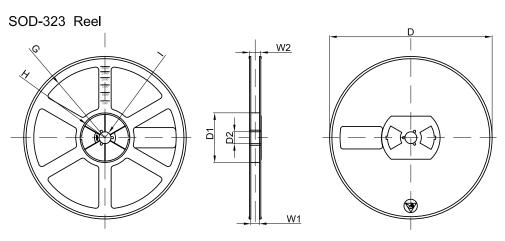


Dimensions are in millimeter								
Reel Option	D	D1	D2	G	Н	Į.	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30


REEL	Reel Size	Вох	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	

0755-23619906 www.jhgsz.com Rev.01 3 / 4



SOD-323 Package Outline Dimensions

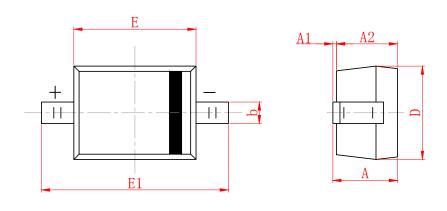

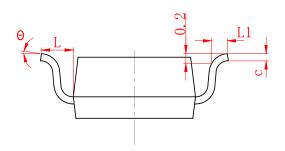

	MILLIMETER				
SYMBOL	MIN	MAX			
A		1.000			
A1	0.000	0. 100			
A2	0.800	0. 900			
b	0. 250	0. 350			
С	0.008	0. 150			
D	1. 200	1. 400			
E	1. 600	1.800			
E1	2. 500	2. 700			
L	0. 475	5 (REF)			
L1	0. 250	0. 400			
θ	0°	8°			

DISCLAIMER

JHG PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with JHG products. You are solely responsible for (1)selecting the appropriate JHG products for your application;

(2)designing, validating and testing your application;

(3)ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. JHG grants you permission to use these resources only for development of an application that uses the JHG products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other JHG intellectual property right or to any third party intellectual property right. JHG disclaims responsibility for, and you will fully indemnify JHG and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

0755-23619906 www.jhgsz.com Rev.01 4 / 4