


# SILICON EPITAXIAL SCHOTTKY BARRIER DIODE

# **Applications**

• High speed switching

#### **PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode

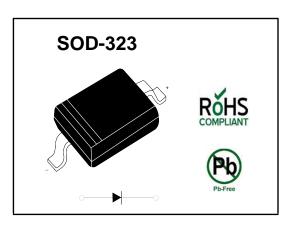

Absolute Maximum Ratings (T<sub>a</sub> = 25 °C)

Parameter	Symbol	Value	Unit
Maximum (Peak) Reverse Voltage	$V_{RM}$	25	V
Reverse Voltage	$V_R$	20	V
Average Forward Current	Io	300	mA
Maximum (Peak) Forward Current	I <sub>FM</sub>	700	mA
Power Dissipation	P <sub>tot</sub>	200	mW
Junction Temperature	T <sub>J</sub>	125	°C
Storage Temperature Range	T <sub>stg</sub>	- 55 to + 125	°C


#### Characteristics at T<sub>2</sub> = 25 °C


Onardoteristics at 1a = 25 G				
Parameter	Symbol	Тур.	Max.	Unit
Forward Voltage at I <sub>F</sub> = 300 mA	V <sub>F</sub>	-	0.45	V
Reverse Current at $V_R = 20 \text{ V}$	I <sub>R</sub>	-	50	μA
Total Capacitance at f = 1 MHz	Ст	46	-	pF


0755-23619906 www.jhgsz.com Rev.01 1/4




## **Typical Characteristics**

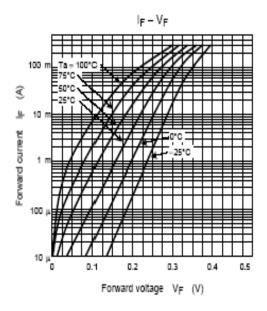

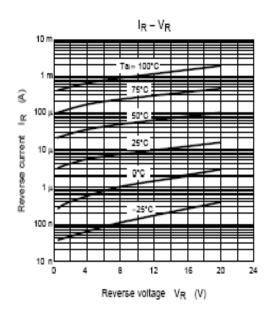

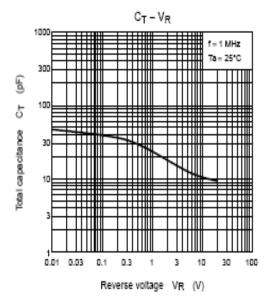

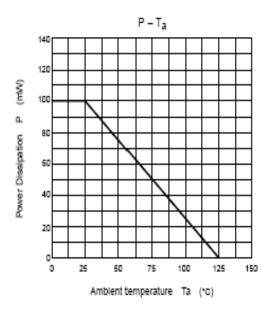


0755-23619906 www.jhgsz.com Rev.01 2 / 4




# SOD-323 Tape and Reel


## SOD-323 Embossed Carrier Tape

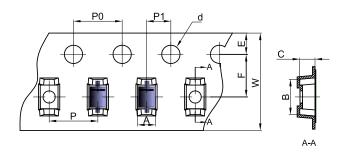

Dimensions are in millimeter										
Pkg type	Pkg type A B C d E F P0 P P1 W						W			
SOD-323	1.48	3.3	1.25	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

# SOD-323 Tape Leader and Trailer

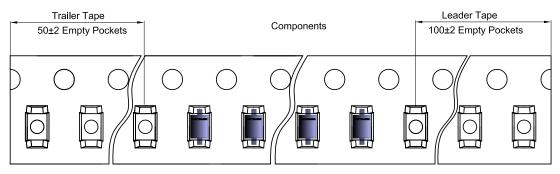

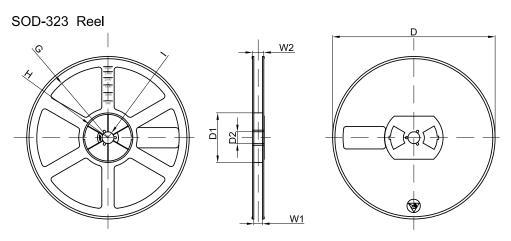


Dimensions are in millimeter								
Reel Option	D	D1	D2	G	Н	Ţ	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30


REEL	Reel Size	Вох	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	

0755-23619906 www.jhgsz.com Rev.01 3 / 4



## **SOD-323 Package Outline Dimensions**

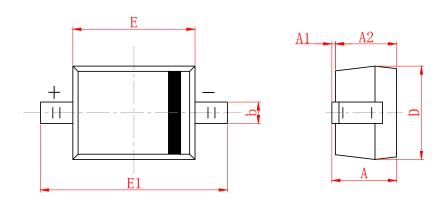

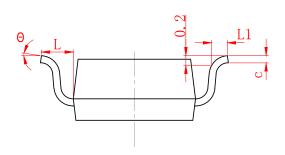

	MILLIMETER			
SYMBOL	MIN	MAX		
A		1.000		
A1	0.000	0. 100		
A2	0.800	0. 900		
b	0. 250	0. 350		
С	0.008	0. 150		
D	1. 200	1. 400		
Е	1.600	1.800		
E1	2. 500	2. 700		
L	0. 475 (REF)			
L1	0. 250	0. 400		
θ	0°	8°		

# **DISCLAIMER**

JHG PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with JHG products. You are solely responsible for (1)selecting the appropriate JHG products for your application;

(2)designing, validating and testing your application;

(3)ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. JHG grants you permission to use these resources only for development of an application that uses the JHG products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other JHG intellectual property right or to any third party intellectual property right. JHG disclaims responsibility for, and you will fully indemnify JHG and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

0755-23619906 www.jhgsz.com Rev.01 4 / 4