



Silicon Planar Zener Diodes

This series of Zener diodes is offered in the convenient, surface mount plastic SOT-323 package. These devices are designed to provide voltage regulation with minimum space requirement. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.

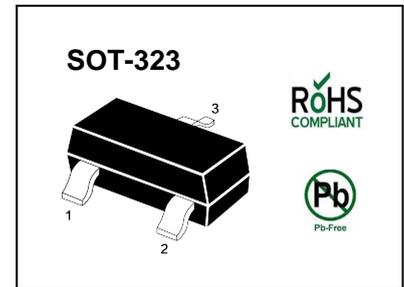

Features

- Zener breakdown voltage range - 2.4 V to 75 V
- Package designed for optimal automated board assembly
- Small package size for high density applications



Absolute Maximum Ratings (T_a = 25 °C)

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	200	mW
Thermal Resistance, Junction to Ambient ¹⁾	R _{θJA}	417	°C/W
Junction and Storage Temperature Range	T _J , T _{stg}	- 65 to + 150	°C


¹⁾ Alumina = 0.4 X 0.3 X 0.024 in, 99.5% alumina

Electrical Characteristics ($T_a = 25\text{ }^\circ\text{C}$ unless otherwise noted, $V_F < 0.9\text{ V}$ at $I_F = 10\text{ mA}$)


Type	Marking Code	Zener Voltage Range ¹⁾				Dynamic Impedance		Reverse Current	
		V_{ZT}			at I_{ZT}	Z_{ZT}	at I_{ZT}	I_R	at V_R
		Nom. (V)	Min. (V)	Max. (V)	(mA)	Max. (Ω)	(mA)	Max. (μA)	(V)
BZX84C2V4W	EA	2.4	2.2	2.6	5	100	5	50	1
BZX84C2V7W	EB	2.7	2.5	2.9	5	100	5	20	1
BZX84C3V0W	EC	3	2.8	3.2	5	95	5	10	1
BZX84C3V3W	ED	3.3	3.1	3.5	5	95	5	5	1
BZX84C3V6W	EE	3.6	3.4	3.8	5	90	5	5	1
BZX84C3V9W	EF	3.9	3.7	4.1	5	90	5	3	1
BZX84C4V3W	EH	4.3	4	4.6	5	90	5	3	1
BZX84C4V7W	EJ	4.7	4.4	5	5	80	5	3	2
BZX84C5V1W	EK	5.1	4.8	5.4	5	60	5	2	2
BZX84C5V6W	EM	5.6	5.2	6	5	40	5	1	2
BZX84C6V2W	EN	6.2	5.8	6.6	5	10	5	3	4
BZX84C6V8W	EP	6.8	6.4	7.2	5	15	5	2	4
BZX84C7V5W	ER	7.5	7	7.9	5	15	5	1	5
BZX84C8V2W	EX	8.2	7.7	8.7	5	15	5	0.7	5
BZX84C9V1W	EY	9.1	8.5	9.6	5	15	5	0.5	6
BZX84C10W	EZ	10	9.4	10.6	5	20	5	0.2	7
BZX84C11W	FA	11	10.4	11.6	5	20	5	0.1	8
BZX84C12W	FB	12	11.4	12.7	5	25	5	0.1	8
BZX84C13W	FC	13	12.4	14.1	5	30	5	0.1	8
BZX84C15W	FD	15	13.8	15.6	5	30	5	0.05	10.5
BZX84C16W	FE	16	15.3	17.1	5	40	5	0.05	11.2
BZX84C18W	FF	18	16.8	19.1	5	45	5	0.05	12.6
BZX84C20W	FH	20	18.8	21.2	5	55	5	0.05	14
BZX84C22W	FJ	22	20.8	23.3	5	55	5	0.05	15.4
BZX84C24W	FK	24	22.8	25.6	5	70	5	0.05	16.8
BZX84C27W	FM	27	25.1	28.9	2	80	2	0.05	18.9
BZX84C30W	FN	30	28	32	2	80	2	0.05	21
BZX84C33W	FP	33	31	35	2	80	2	0.05	23.1
BZX84C36W	FR	36	34	38	2	90	2	0.05	25.2
BZX84C39W	FX	39	37	41	2	130	2	0.05	27.3
BZX84C43W	FY	43	40	46	2	150	2	0.05	30.1
BZX84C47W	FZ	47	44	50	2	170	2	0.05	32.9
BZX84C51W	KA	51	48	54	2	180	2	0.05	35.7
BZX84C56W	KB	56	52	60	2	200	2	0.05	39.2
BZX84C62W	KC	62	58	66	2	215	2	0.05	43.4
BZX84C68W	KD	68	64	72	2	240	2	0.05	47.6
BZX84C75W	KE	75	70	79	2	255	2	0.05	52.5

¹⁾ Tested with pulses $t_p = 20\text{ ms}$.


Temperature Coefficient

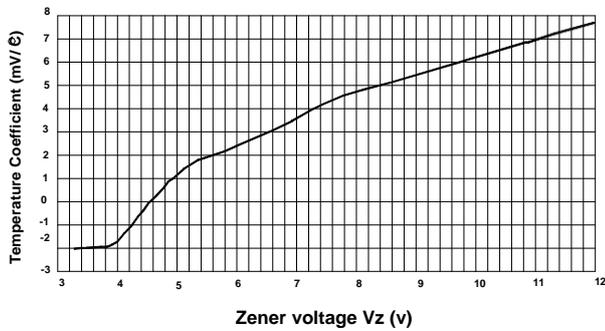



Temperature Coefficient

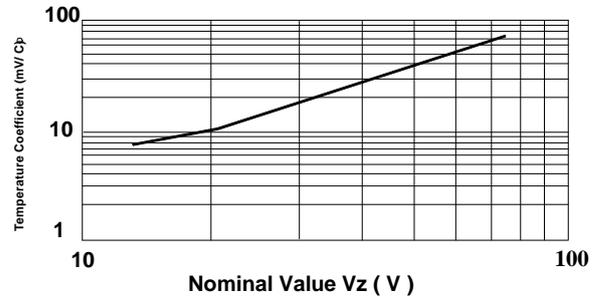

Power Derating Curve

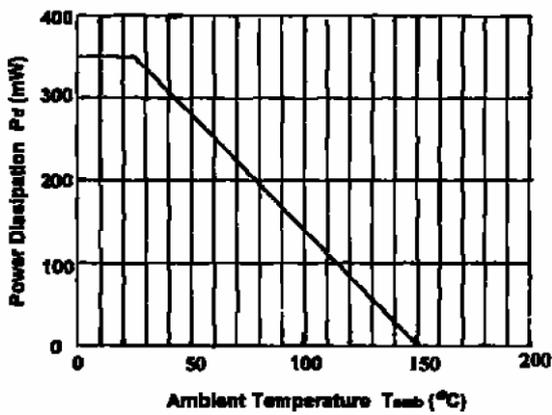

Typical Forward Voltage

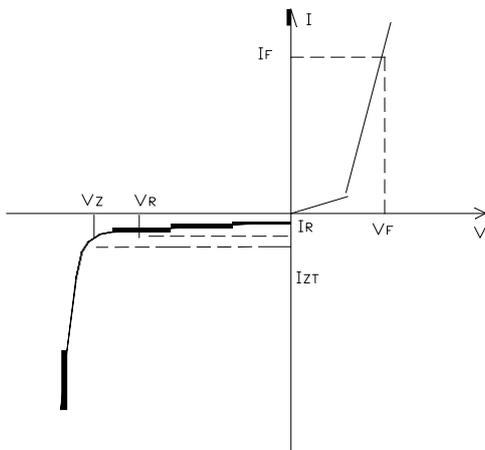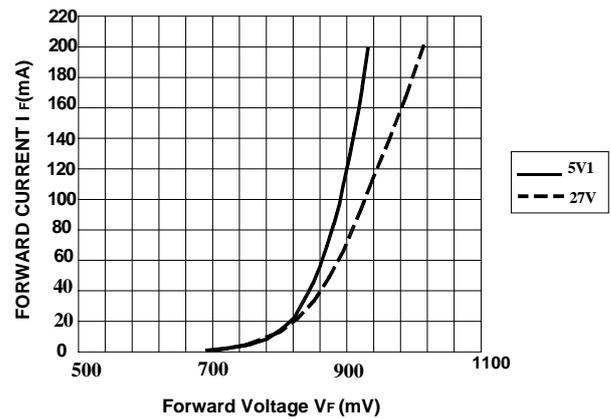


Zener Voltage Regulator

SOT-323 Tape and Reel


SOT-323 Tape and reel

SOT-323 Embossed Carrier Tape

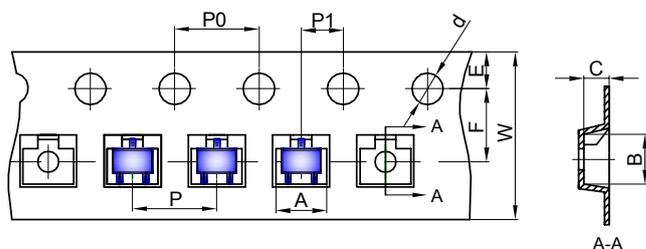


Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-323	2.25	2.55	1.19	Ø1.55	1.75	3.50	4.00	4.00	2.00	8.00

SOT-323 Tape Leader and Trailer

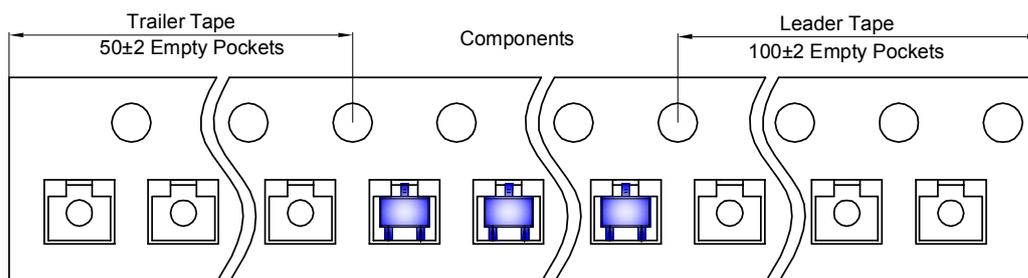


SOT-323 Reel

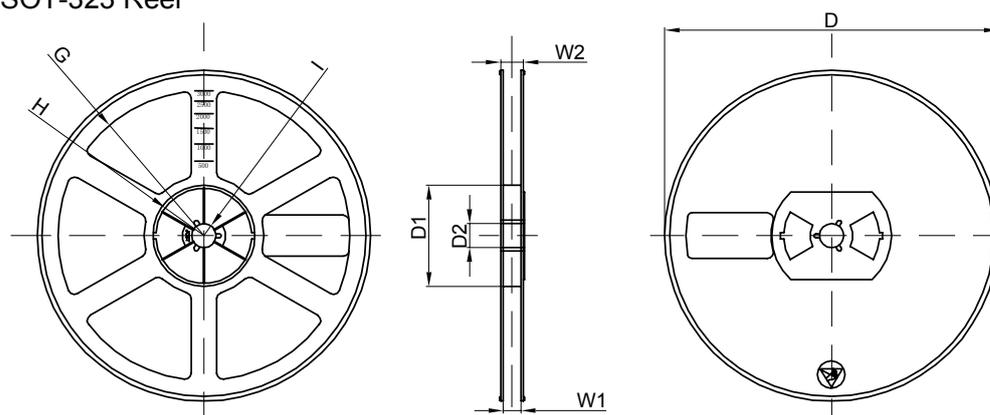

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	

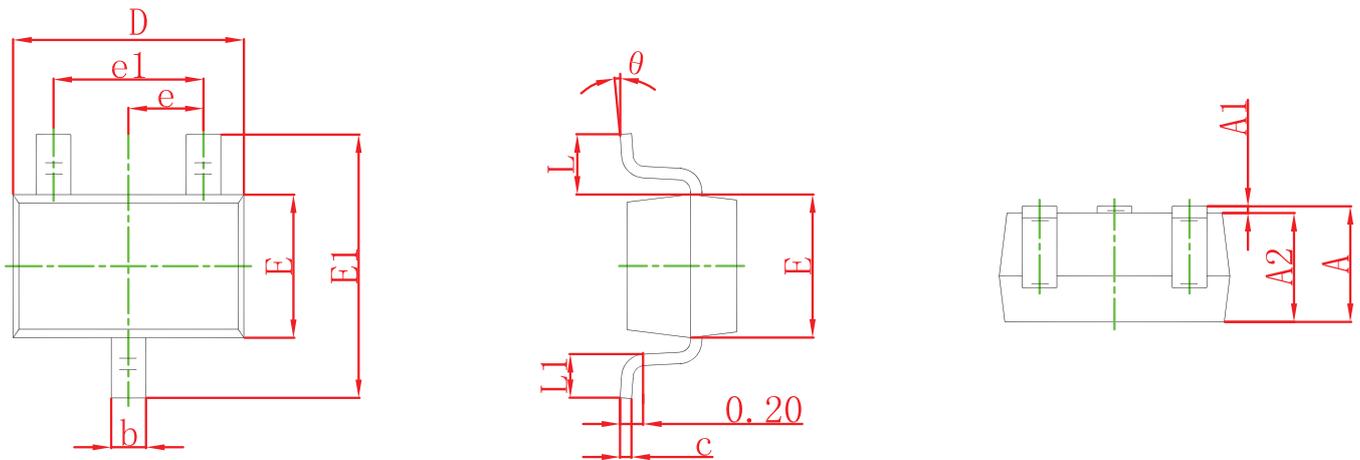

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

DISCLAIMER

JHG PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with JHG products. You are solely responsible for

- (1) selecting the appropriate JHG products for your application;
- (2) designing, validating and testing your application;
- (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. JHG grants you permission to use these resources only for development of an application that uses the JHG products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other JHG intellectual property right or to any third party intellectual property right. JHG disclaims responsibility for, and you will fully indemnify JHG and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.